

# sonawood panel™

PERFORATED WOOD PANELS FOR CEILINGS AND WALLS



TECHNICAL DATA SHEET    BPIR - CLASS 1



# sonawood panel™

## Perforated Wood Panels for Ceilings and Walls

### Technical Data Sheet - BPIR Class 1

Sonawood™ is a made in NZ perforated wood panel with acoustic tissue backing designed to control unwanted noise in interior spaces. Panels may be customised according to substrate, decorative finish, acoustic perforations and sized to meet individual project requirements. SlimSet 50™ and SlimSet 60™ Access Hatches available where maintenance for plenum services is required.

#### Application


Sonawood™ is ideal for corporate offices, hotels, retail, schools and sports centres.

#### Composition


Substrates are from FR MDF, MDF, Plywood, or FR Plywood, with natural wood veneer, low pressure laminates, paint, stain or clear coat finishes, and acoustic backing. Framing is from galvanised steel or timber.

#### Features & Benefits

- An attractive high performance acoustic ceiling or wall panel that can be customised to size and perforation.
- Available in a range of standard hole and slot perforation patterns to meet acoustic performance criteria.
- Range of substrates—FR MDF, FR Plywood, or standard MDF or Plywood, all acoustic tissue backed as standard.
- Veneer finish and plywood options provide the warmth of natural wood and are typically clear coated or stained.
- Pre-finished low pressure laminate finishes provide excellent colour and pattern consistency at lower cost.
- Panels available raw for on site coating or factory finished with UV, powder coat or premium 2 pack coatings.
- Fire Group 3, 2-S, 1-S performance subject to substrate and perforated open area selected.
- Tuneable acoustic performance, NRC 0.1 up to 0.80.
- Also available as a lay-in ceiling tile to fit Rondo DX grid.
- Range of fixing options, face fix, concealed fix, split rail.
- Standard 600 x 600 mm and 500 x 500mm SlimSet™ integrated access hatches.
- Asona in-house design service for shop drawings prior to manufacture. Ideal to integrate M/E services, penetrations (eg power outlets), borders etc.

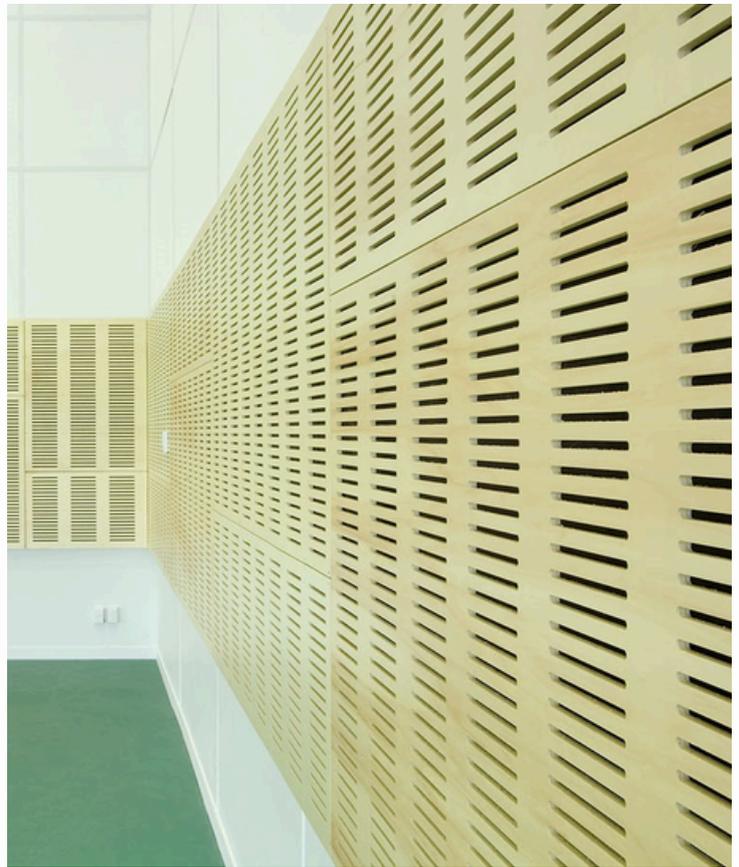

Hobsonville Point secondary school

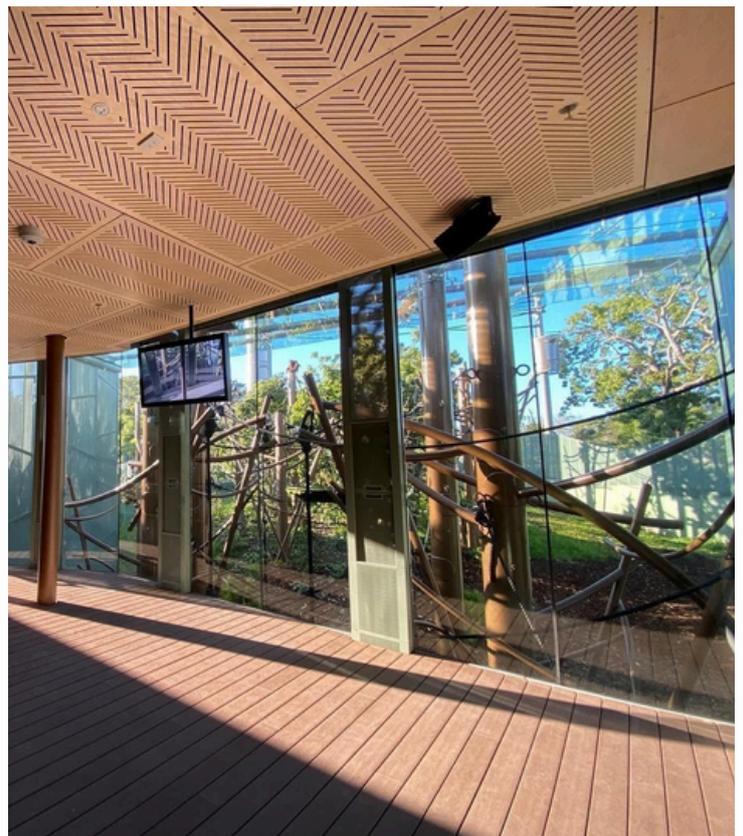

Orangutang enclosure—Auckland Zoo

ISO 9001:2015 Registered Firm No. NZ1014

© 2026 Copyright ASONA Ltd, Asona, Sonawood and SlimSet are trademarks of Asona Limited. KEY-LOCK and Xpress are trademarks of Rondo Building Services Pty Ltd  
All dimensions are nominal. We reserve the right to change specifications without notice.  
Ref. Sonawood-26.03

Asona Ltd. Office & Factory  
6 Mahunga Drive, Māngere  
Bridge, Auckland 2022  
New Zealand  
NZBN: 9429036035175

New Zealand  
T: +64(0)9 525 6575  
E: info@asona.co.nz  
W: www.asona.co.nz

Australia  
T: 1 800 240361  
E: info@asona.com.au  
W: www.asona.com.au

**asona**

## Sonawood Panel Selection Options

<b>Early Fire Reaction Group</b>	1-S / 2-S / 3
<b>Substrate Type</b>	MDF / Black FR MDF / FR MDF / Plywood / FR Plywood
<b>Finish Type</b>	Natural wood veneer / Low pressure laminate / Paint / Stain / Clear coat
<b>Wood Veneer Cut *</b>	Crown / Quarter / Rotary / Recut
<b>Wood Veneer Layup *</b>	Book / Slip / Planked / Planked Rustic
<b>Panel Size (nominal)</b>	1200 x 2400mm / _____ x _____ mm
<b>Perforation Code #</b>	
<b>Installation Method</b>	

\* Contact Asona for detailed information on Natural Wood Veneer cut and layup options)

### NZBC C/AS2 Risk Groups and EFR Group Requirements

#### 4.12.1 Surface finish requirements for walls and ceilings

4.12.1.1 *Surface finish* requirements shall be as specified in [Table 4.12.1.1](#) for walls and ceilings.

**Table 4.12.1.1: Maximum permitted Group Number for internal surface finishes**

Paragraph [4.12.1.1](#)

Location in the building	Maximum permitted Group Number for spaces not protected with an automatic fire sprinkler system	Maximum permitted Group Number for spaces protected with an automatic fire sprinkler system	Risk Group
<i>Exitways and Importance Level 4 buildings: walls and ceilings</i>	1-S	2	SM SI CA WB
Sleeping spaces where care or detention is provided: walls and ceilings	1-S	2	SI
Other sleeping spaces (excluding within <i>household units</i> ) and crowd spaces: ceiling surfaces	2-S	2	SM CA WB
Other sleeping spaces (excluding within <i>household units</i> ) and crowd spaces: wall surfaces	2-S	3	SM CA WB
All other occupied spaces: walls and ceilings	3	3	CA WB

#### Clause

#### 4.12 Interior surface finishes, floor coverings and suspended flexible fabrics

##### Surface finish requirements for walls and ceilings

4.12.1 Surface finish requirements shall be as specified in Table 4.12.1.1 for walls and ceilings.

##### 4.12.4 Exceptions to surface finish requirements

4.12.4.1 Surface finish requirements do not apply to:

- Small areas of non-conforming product within a firecell with a total aggregate surface not more than 5.0 m<sup>2</sup>.

##### Educational buildings

4.12.4.2 Unsprinklered firecells containing classrooms, passageways and corridors of educational buildings need not comply with Table 4.12.1.1 provided all the following conditions are satisfied:

- The occupant load is less than 250, and
- The firecells are at ground floor level and are served by at least two exitways or final exits, and
- The material Group Number is no more than 2-S for surfaces 1.2m or more above floor level, and
- The material Group Number is no more than 3 for surfaces less than 1.2 m above floor level.

#### Sonawood finishes Group Number

Substrate	Finish	Perforated	Non-perforated
MDF	Laminate (LPL)	3	3
	Natural veneer	3	3
	Paint <sup>1</sup>	3	3
FR MDF Black	Laminate (LPL)	2-S	1-S
	Natural veneer	TBC	1-S
	Paint <sup>1</sup>	2-S	1-S
FR MDF	Laminate (LPL)	2-S	1-S
	Natural veneer	TBC	1-S
	Paint <sup>1</sup>	2-S	1-S
Plywood	Natural	3	3
	Coatings <sup>2</sup>	3	3
	Stain	3	3
FR Plywood	Poplar	1-S	1-S

<sup>1</sup> Paint option includes powder coated or wet


<sup>2</sup> Coatings include clear, UV

Intumescent also available which will provide a 1-S

## Finish Options

### Substrate Type

MDF



Black FR MDF



FR MDF MR



Plywood



### Finish Type

Low Pressure Laminates—wood look or solid colours available\* (refer to Asona for full range)


Nordic Pine



Premium Oak



Tawa



French Oak



Sovereign Oak



Rimu



Tahoe Walnut



Black Forest Oak



### Standard Substrate Size

Panels are machined from substrates sized to allow for side trimming and for expansion and contraction on site. For example 2440 x 1220mm substrates are machined to 2397 x 1197mm for a nominal 2400 x 1200mm panel with allowance for 3mm gap between panels.

Nominal sizes:

2400 x 1200mm, 2700 x 1200mm, others to order

Thickness:

12mm\*, others to order, consult Asona

(\*13mm for natural wood veneers)

\* Colour representations are as close as printing permits. Clear coat and intumescent coating may affect final colour. Always make your colour selections from an actual sample, not from a digital screen.


Natural wood veneers—wide range available, contact Asona. (Supplied precoated clear. May be supplied "raw" for site intumescent coating.)

Painted and stained finishes—wide range available, contact Asona. (Paint finish suitable for MDF only; Stain finish suitable for Veneer and Plywood only)


NOTE: Material type and wood species selection may affect surface finish and surface chipping on plywood. FR Plywood available in Poplar wood species only. Consult Asona prior to specification.

## Perforation Patterns


Hole-Square  
16 or 32mm centres




NB = No Border option for W1L1




Slot-Width \*




Slot-Staggered \*




Hole-Diagonal  
16 or 32mm centres



Hole-Linear  
16x32mm centres



Slot-Length \*



Slot-Herringbone \*




**Perforation Clusters** (Square pattern holes, Diagonal pattern holes, Linear pattern holes or Slot perforations)


\*As viewed with panel landscape orientation

Refer to <https://asona.co.nz/technical-library> for technical drawings.


Open area % is measured over a full panel size including borders and non-perforated areas.



Hole Ø /spacing ctrs	6 @ 16mm	8 @ 16mm	8 @ 32mm	10 @ 16mm	12 @ 32mm	16 @ 32mm	50 @ 100mm
Open Area SQ %	9.8%	17.4%	4.4%	27.2%	9.9%	17.7%	17.3%
Perforation Code #	H6.16.S.50 W1L1	H8.16.S.50 W1L1	H8.32.S.50 W1L1	H10.16.S.50 W1L1	H12.32.S.50 W1L1	H16.32.S.50 W1L1	H50.100.S.75 W1L1
Open Area SQ % NB	11.0%	19.6%	11.0%	-	11.0%	19.6%	-
Perforation Code # NB	H6.16.S.8 W1L1	H8.16.S.8 W1L1	H8.32.S.8 W1L1	-	H12.32.S.8 W1L1	H16.32.S.8 W1L1	-
Open Area DIAG %	9.8%	17.4%	4.4%	27.2%	9.9%	17.7%	19.4%
Perforation Code #	H6.16.D.50 W1L1	H8.16.D.50 W1L1	H8.32.D.50 W1L1	H10.16.D.50 W1L1	H12.32.D.50 W1L1	H16.32.D.50 W1L1	H50.100.D.75 W1L1
Open Area LINEAR %	5%	8.8%	-	13.8%	19.7%	-	-
Perforation Code #	H6.16/32.S.50 W1L1	H8.16/32.S.50 W1L1	-	H10.16/32.S.50 W1L1	H12.16/32.S.50 W1L1	-	-
<b>Slot Width</b>		<b>8mm</b>		<b>10mm</b>	<b>12mm</b>		
Open Area SQ %	-	20.7%	-	25.9%	31.0%	-	-
Perforation Code #	-	SS8.300.25 W1L1	-	SS10.300.25 W1L1	SS12.300.25 W1L1	-	-




Hole Ø /spacing ctrs	6 @ 16mm	8 @ 16mm	8 @ 32mm	10 @ 16mm	12 @ 32mm	16 @ 32mm	50 @ 100mm
Open Area SQ %	9.4%	16.7%	4.3%	26.1%	9.7%	17.2%	16.6%
Perforation Code #	H6.16.S.50 W1L2	H8.16.S.50 W1L2	H8.32.S.50 W1L2	H10.16.S.50 W1L2	H12.32.S.50 W1L2	H16.32.S.50 W1L2	H50.100.S.75 W1L2
Open Area DIAG %	9.5%	16.8%	4.2%	26.3%	9.5%	16.9%	18.8%
Perforation Code #	H6.16.D.50 W1L2	H8.16.D.50 W1L2	H8.32.D.50 W1L2	H10.16.D.50 W1L2	H12.32.D.50 W1L2	H16.32.D.50 W1L2	H50.100.D.75 W1L2




Hole Ø /spacing ctrs	6 @ 16mm	8 @ 16mm	8 @ 32mm	10 @ 16mm	12 @ 32mm	16 @ 32mm	50 @ 100mm
Open Area SQ %	9.1%	16.2%	4.0%	25%	9.1%	16.2%	15.7%
Perforation Code #	H6.16.S.50 W2L1	H8.16.S.50 W2L1	H8.32.S.50 W2L1	H10.16.S.50 W2L1	H12.32.S.50 W2L1	H16.32.S.50 W2L1	H50.100.S.75 W2L1
Open Area DIAG %	8.9%	15.8%	4.0%	24.6%	8.9%	15.9%	16.7%
Perforation Code #	H6.16.D.50 W2L1	H8.16.D.50 W2L1	H8.32.D.50 W2L1	H10.16.D.50 W2L1	H12.32.D.50 W2L1	H16.32.D.50 W2L1	H50.100.D.75 W2L1
<b>Slot Width</b>		<b>8mm</b>		<b>10mm</b>	<b>12mm</b>		
Open Area SQ %	-	17.3%	-	21.7%	26.0%	-	-
Perforation Code #	-	SW8.520.40 W2L1	-	SW10.520.40 W2L1	SW12.520.40 W2L1	-	-

**Perforation Clusters** (Square pattern holes, Diagonal pattern holes, Linear pattern holes or Slot perforations).


Open areas exclude borders and non-perforated areas.




Hole Ø /spacing ctrs	6 @ 16mm	8 @ 16mm	8 @ 32mm	10 @ 16mm	12 @ 32mm	16 @ 32mm	50 @ 100mm
Open Area SQ %	8.1%	14.4%	3.8%	22.5%	8.5%	15.1%	14.2%
Perforation Code #	H6.16.S.50 W3L1	H8.16.S.50 W3L1	H8.32.S.50 W3L1	H10.16.S.50 W3L1	H12.32.S.50 W3L1	H16.32.S.50 W3L1	H50.100.S.75 W3L1
Open Area DIAG %	7.9%	14.1%	3.7%	22.0%	8.2%	14.6%	14.0%
Perforation Code #	H6.16.D.50 W3L1	H8.16.D.50 W3L1	H8.32.D.50 W3L1	H10.16.D.50 W3L1	H12.32.D.50 W3L1	H16.32.D.50 W3L1	H50.100.D.75 W3L1
<b>Slot Width</b>	8mm		10mm		12mm		
Open Area SQ %	-	16.0%	-	19.9%	23.9%	-	-
Perforation Code #	-	SW8.320.40 W3L1	-	SW10320.40 W1L1	SW12.320.40 W3L1	-	-




Slot Width	8mm	10mm	12mm
Open Area %	14.0%	18.2%	21.8%
Perforation Code #	SW8.220.40 W4L1	SW10.220.40 W4L1	SW12.220.40 W4L1




Slot Width	8mm	10mm	12mm
Open Area %	13.2%	16.5%	19.8%
Perforation Code #	SW8.160.40 W5L1	SW10.160.40 W5L1	SW12.160.40 W5L1



Slot Width	8mm	10mm	12mm
Open Area % Vertical	11.9%	14.8%	17.7%
Perforation Code #	SW8.120.40 W6L1	SW10.120.40 W6L1	SW12.120.40 W6L1
Open Area % Herring	16.7%	21.0%	25.4%
Perforation Code #	SAB.180.50 W6L1	SA10.182.48 W6L1	SA12.184.46 W6L1



Slot Width	8mm	10mm	12mm
Open Area %	17.3%	21.7%	32.0%
Perforation Code #	SW8.520.40 W1L4	SW10.520.40 W1L4	SW12.520.40 W1L4




Slot Width	8mm	10mm	12mm
Open Area %	16.7%	20.8%	24.9%
Perforation Code #	SW8.400.40 W1L5	SW10.400.40 W1L5	SW12.400.40 W1L5




**Perforation Clusters** (Square pattern holes, Diagonal pattern holes, Linear pattern holes or Slot perforations).


Open areas exclude borders and non-perforated areas.




Slot Width	8mm	10mm	12mm
Open Area %	16.0%	20.8%	23.9%
Perforation Code #	SW8.320.40 W1L6	SW10.320.40 W1L6	SW12.320.40 W1L6




Slot Width	8mm	10mm	12mm
Open Area %	14.6%	18.2%	21.8%
Perforation Code #	SW8.220.40 W1L8	SW10.220.40 W1L8	SW12.220.40 W1L8



Slot Width	8mm	10mm	12mm
Open Area %	13.2%	16.5%	19.8%
Perforation Code #	SW8.160.40 W1L10	SW10.160.40 W1L10	SW12.160.40 W1L10



Hole Ø / spacing ctrs	6 @ 16mm	8 @ 16mm	8 @ 32mm	10 @ 16mm	12 @ 32mm	16 @ 32mm	50 @ 100mm
Open Area SQ %	8.7%	15.5%	3.9%	24.2%	8.8%	15.7%	15.1%
Perforation Code #	H6.16.S.50 W2L2	H8.16.S.50 W2L2	H8.32.S.50 W2L2	H10.16.S.50 W2L2	H12.32.S.50 W2L2	H16.32.S.50 W2L2	H50.100.S.75 W2L2
Open Area DIAG %	8.6%	15.2%	3.8%	23.8%	8.6%	15.2%	16.2%
Perforation Code #	H6.16.D.50 W2L2	H8.16.D.50 W2L2	H8.32.D.50 W2L2	H10.16.D.50 W2L2	H12.32.D.50 W2L2	H16.32.D.50 W2L2	H50.100.D.75 W2L2



Hole Ø / spacing ctrs	6 @ 16mm	8 @ 16mm	8 @ 32mm	10 @ 16mm	12 @ 32mm	16 @ 32mm	50 @ 100mm
Open Area SQ %	8.1%	14.4%	3.6%	22.4%	8.1%	14.4%	13.7%
Perforation Code #	H6.16.S.50 W2L4	H8.16.S.50 W2L4	H8.32.S.50 W2L4	H10.16.S.50 W2L4	H12.32.S.50 W2L4	H16.32.S.50 W2L4	H50.100.S.75 W2L4
Open Area DIAG %	7.9%	14.1%	3.5%	22.1%	7.8%	13.9%	14.8%
Perforation Code #	H6.16.D.50 W2L4	H8.16.D.50 W2L4	H8.32.D.50 W2L4	H10.16.D.50 W2L4	H12.32.D.50 W2L4	H16.32.D.50 W2L4	H50.100.D.75 W2L4




Slot Width		8mm		10mm	12mm		
Open Area %	-	15.6%	-	19.4%	23.3%	-	-
Perforation Code #	-	SW8.500.50 W2L4	-	SW10.500.50 W2L4	SW12.500.50 W2L4	-	-

**Custom Perforations / Service Penetration Blank Areas**

Example: random perforation with 3 hole sizes. Custom borders or blank areas are available to suit service integration penetrations.

Consult Asona for detailing and shop drawings.

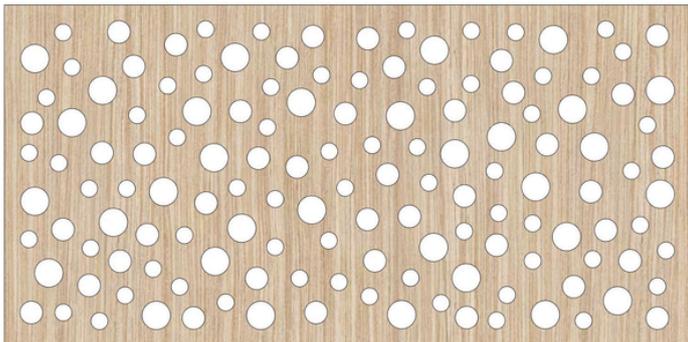

ISO 9001:2015 Registered Firm No. NZ1014

© 2026 Copyright ASONA Ltd, Asona, Sonawood and SlimSet are trademarks of Asona Limited. KEY-LOCK and Xpress are trademarks of Rondo Building Services Pty Ltd  
All dimensions are nominal. We reserve the right to change specifications without notice.  
Ref. Sonawood-26.03

Asona Ltd. Office & Factory New Zealand  
6 Mahunga Drive, Māngere Bridge, Auckland 2022  
New Zealand  
NZBN: 9429036035175


New Zealand  
T: +64(0)9 525 6575  
E: info@asona.co.nz  
W: www.asona.co.nz

Australia  
T: 1 800 240361  
E: info@asona.com.au  
W: www.asona.com.au




## Installation Options


Face fix with 40mm panel pins

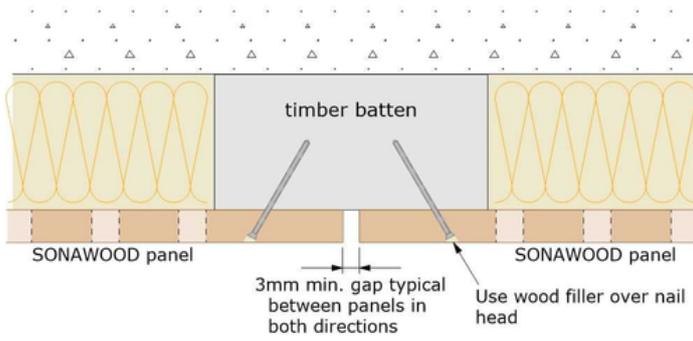


Face fix with countersunk screws to Rondo KEY-LOCK® furring channel/batten

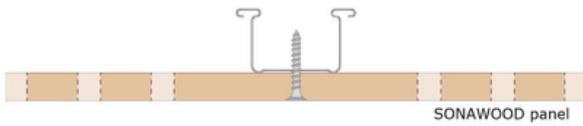


Face fix with countersunk screws to Rondo Xpress®

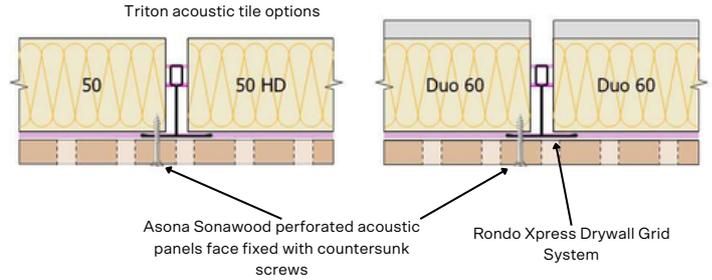

Secret fix / hidden screw to #FFB mounting strip to Rondo KEY-LOCK® furring channel/batten

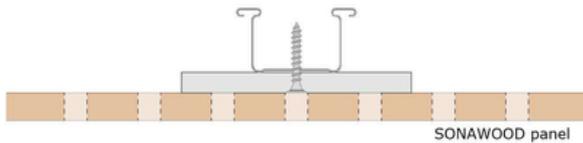


Secret fix / hidden screw to #FFB mounting strip to Rondo Xpress®

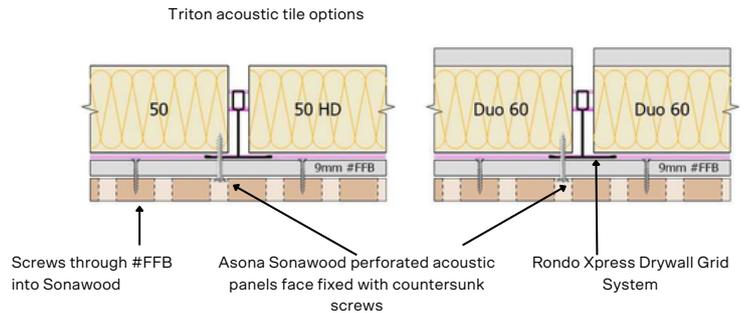


## Demountable Mounting (Walls Only)

Secret fix with Z bar split rail and clip—wall mounting only

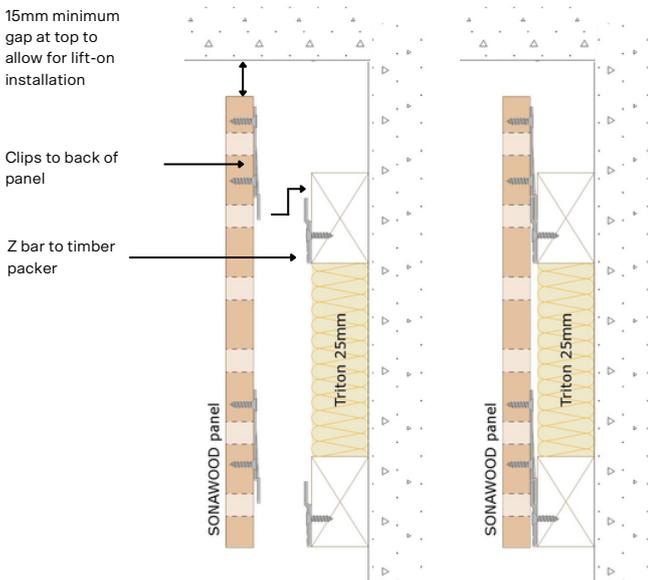

Secret fix with Z bar split rail and clip—wall mounting only

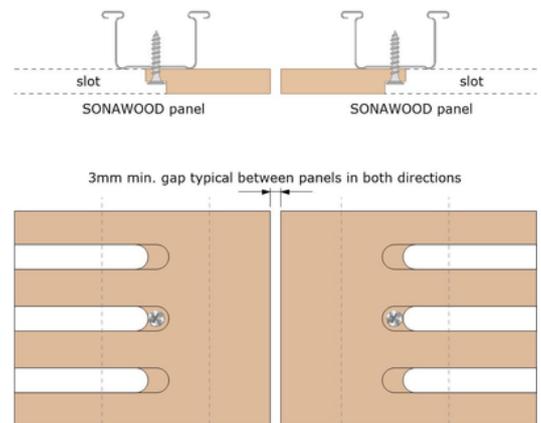

Contact Asona for full Installation Manuals for the above mounting systems.

ISO 9001:2015 Registered Firm No. NZ1014

© 2026 Copyright ASONA Ltd, Asona, Sonawood and SlimSet are trademarks of Asona Limited. KEY-LOCK and Xpress are trademarks of Rondo Building Services Pty Ltd  
All dimensions are nominal. We reserve the right to change specifications without notice.  
Ref. Sonawood-26.03


Asona Ltd. Office & Factory New Zealand  
6 Mahunga Drive, Māngere Bridge, Auckland 2022  
New Zealand  
NZBN: 9429036035175

Australia  
T: +64(0)9 525 6575  
E: info@asona.co.nz  
W: www.asona.co.nz


Australia  
T: 1 800 240361  
E: info@asona.com.au  
W: www.asona.com.au

**asona**



**SlimSet™ Access Hatch Installation**  
Rondo Key-Lock® suspension layout

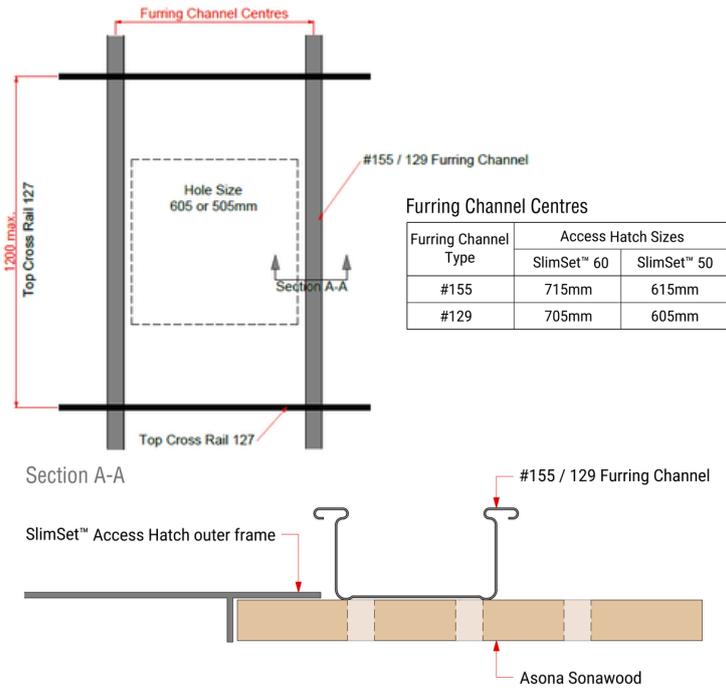



Rondo Xpress® suspension layout

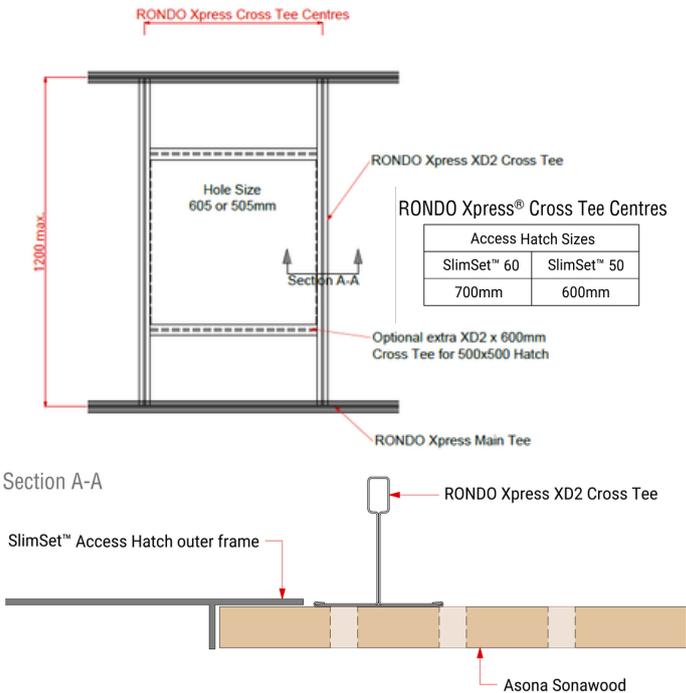



Hatch cut-out and installation




Locate position of hatch between suspension framing. Cut hole 5mm larger than hatch size, ie 605mm or 505mm.



Ensure the back of the Sonawood is debris free. Remove the lid from the hatch and feed the outer frame diagonally through the opening, ensuring the hatch is orientated in the right direction for the lid to open.




Temporarily clamp the frame and screw fix from the back through the external flange into the Sonawood on all four sides. Screws max at 150mm centres. Remove the clamps.



If suitable, use the hole cut-out piece for the lid, otherwise cut a section from another sheet to match the perforation pattern. Attach to lid frame. Reinstall the lid into the outer frame.

## Sonawood Composition Examples

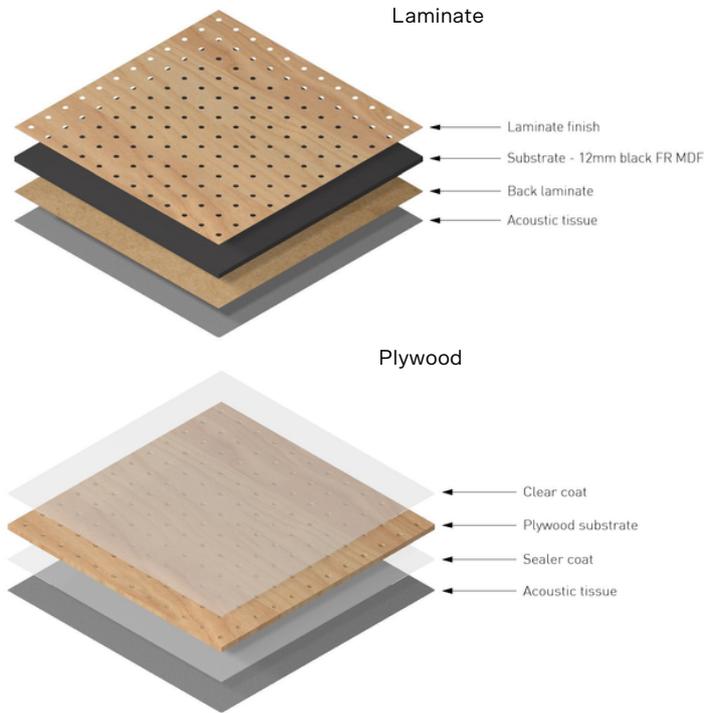

## Technical Specifications

### Finishes: All panel types

Pre-finished in a range of decorative surface finishes from paint, clear coat lacquer, stain, or prefinished laminates. FR Plywood available in Poplar wood species only.

### Limitations:

- For interior use only, and not in direct contact with moisture or in extreme humidity conditions.
- Not for use with negative air return plenums.
- Maximum humidity/temperature 90% R/H at 30°C.
- Maximum weight that can be directly integrated into the ceiling eg: lighting, A/C grill, speakers etc, shall not exceed 1.5kg. Greater weights shall be independently supported.
- Plywood types may be limited by the ply lamination process and acceptable machinability quality. Do not butt panels edge to edge. Lead times apply, contact Asona.

### Maintenance:

Clean with vacuum, soft brush. May be cleaned with a damp soapy cloth, clean away residual soap and dry after cleaning.

### NZ Building Act

This product is not subject to a warning or ban under Section 26.

### NZ Building Code Compliance:

- B2 Durability – Clause B2.3.1 (b) (i): Asona Sonawood with only normal maintenance will have a minimum durability of at least 15 years when installed in accordance with; manufacturer's installation requirements and AS/NZS 2785:2020.
- C3 Fire – Clause C/AS2 4.12.1: Asona Sonawood has a Fire Material

### Group Number :

3—perforated plywood, MDF with LPL or natural wood veneer

2-S—perforated FR MDF with laminates

1-S—non perforated solid FR MDF with natural wood veneer, LPL or paint, FR Plywood perforated or non-perforated.

NZBC Building Product Specification Parts 8.5.4 or 8.5.5, tested in accordance with ISO 9705 or ISO 5660.

### Warranty:

15 year limited warranty against manufacturing defects.

**Weight:** (subject to board type density and perforation open area)

4.2—10 kg/m<sup>2</sup> Contact Asona.

## Practical Sound Absorption Coefficients:

ISO 354 E-200, Test reports T2312-3 to 8

\* with Triton 50 acoustic tile backer

ITEM	Open Area*	NRC	125 Hz	250 Hz	500 Hz	1K Hz	2K Hz	4K Hz
<b>H8.16 NB</b>	19.6	0.70	0.50	0.70	0.80	0.70	0.65	0.70
<b>H8.16 NB*</b>	19.6	0.75	0.60	0.75	0.75	0.80	0.80	0.80
<b>SW10.520</b>	21.7	0.65	0.55	0.70	0.80	0.60	0.60	0.55
<b>SW10.520*</b>	21.7	0.70	0.65	0.70	0.75	0.70	0.65	0.65
<b>SW12.520</b>	26.0	0.70	0.45	0.70	0.80	0.65	0.60	0.55
<b>SW12.520*</b>	26.0	0.80	0.70	0.80	0.80	0.80	0.70	0.70

### Installation:

Shall not commence until the building is water tight and dry. Sonawood wall panels shall be installed with a full perimeter support and plywood ceiling panels must have the face grain running at right angles to framing members. If panels are to be face fixed, timber framing members are recommended to enable more discrete fixings to be used. To minimise the risk of buckling, it is recommended that the panels be allowed to acclimatise in the area in which they are being installed no less than 2 days. Allowance of 3mm minimum shall be made between panels to accommodate swelling and building movement. Refer full Installation Manual.

### Specification:

Acoustical treatment shall be Sonawood perforated wood acoustical panel manufactured by Asona Limited. Tel: 09 525 6575, info@asona.co.nz. Substrates: (Black FR MDF) (FR MDF) (standard MDF) (Plywood) (FR Plywood); Fire Group ( );

Finish Type: Natural Wood Veneer ( ), LPL ( ) (Natural)

Finish: paint ( ), stain ( ), clear ( )

Panel Size: ( ) x ( )mm x ( )mm thick,

Perforation: Type ( ), Perforation Cluster: ( ), Code#: ( )

Installation method: ( ), Install SlimSet™ (60)(50) Access Hatch.

Contractor shall register the ceiling with Asona on practical completion. (Asona Masterspec 5172AA specification available).

