


Installation Procedure:

1. Screw fix 'L' angle to substrate.
2. Locate timber packing battens at 2420 and 1220 crs
3. Apply construction adhesive to back of Triton40 panel and direct fix to ceiling lining
4. Screw fix top hat section to secure Triton 40 panel in place

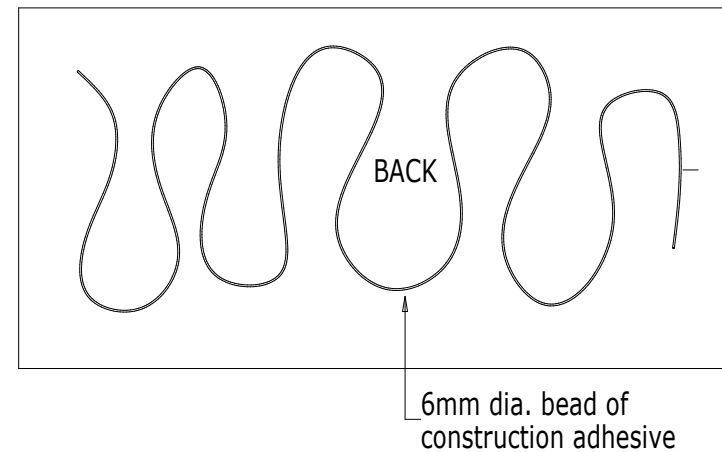

Title:
Triton 40 Sports Direct Fix

Product:
Asona Triton 40 Sports System

Description:
Asona Triton 40 Sports acoustic panel with impact resistant facing of woven glass fabric. NRC 0.95. Direct fixed to solid lining.

Drawing No.: TS-011
Rev No.: 001
Scale: A4 @ 1:3
Date: 29/05/2015

Ph: +64 (0)9 5256575
Fax: +64 (0)9 5256579
Email: info@asona.co.nz
Web: www.asona.co.nz



asona

© 2014 copyright asona ltd